



PLAN

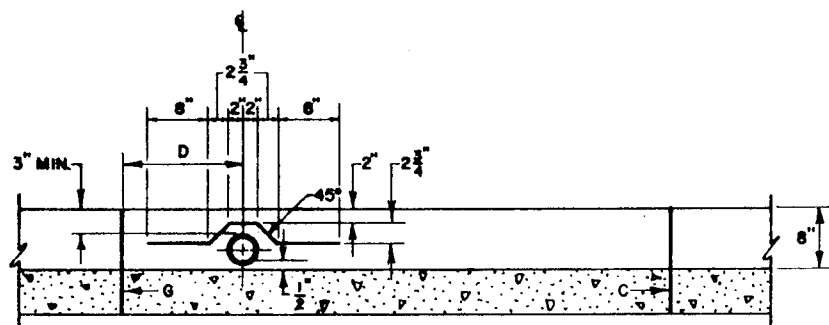

SECTION A-A



SECTION B-B

## GENERAL NOTES:

1. WHEN PLACING DRAIN THROUGH EXISTING CURB, REMOVE AND REPLACE ENTIRE STONE OF CURB AND GUTTER.
2. THE CITY DOES NOT ACCEPT RESPONSIBILITY FOR MAINTENANCE FOR ANY DRAIN LINES INSTALLED BY OR FOR PRIVATE PROPERTY OWNERS.

## CONSTRUCTION NOTES:

- A. DRAIN, D.I. OR SCH. 40 P.V.C. PIPE, 4" NOM. SIZE (MAX.) TO PROPERTY.
- B. 2-NO. 3 BARS, 2'-4" LONG, PLACED AS SHOWN.
- C. COLD JOINT.
- D. DISTANCE FROM  $\phi$  OF DRAIN TO NEAREST JOINT, VARIABLE WITH 16" MIN.
- E. SLOPE  $\frac{1}{4}$ " PER FT. WITHIN R.O.W.
- F. DRAIN PIPE NOT TO PROTRUDE BEYOND CURB FACE.
- G. JOINT NEAREST TO DRAIN TO BE AN EXPANSION JOINT.

CITY OF ALBUQUERQUE	
DRAINAGE	
DRAIN LINE THROUGH CURB	
DWG. 2235	
AUG. 1986	
REVISIONS	